




Driver ON/OFF 832 60

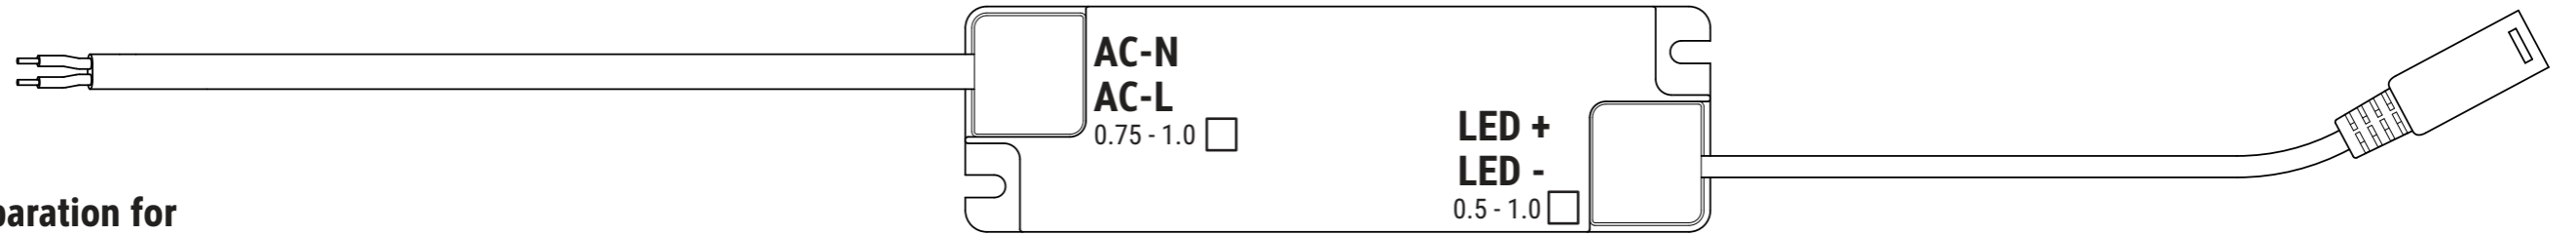

Preparation for input and output



Input: 220 - 240V~ 50/60 Hz max. 0.3A
Output Voltage: 25 - 42V== 850 mA (CC)

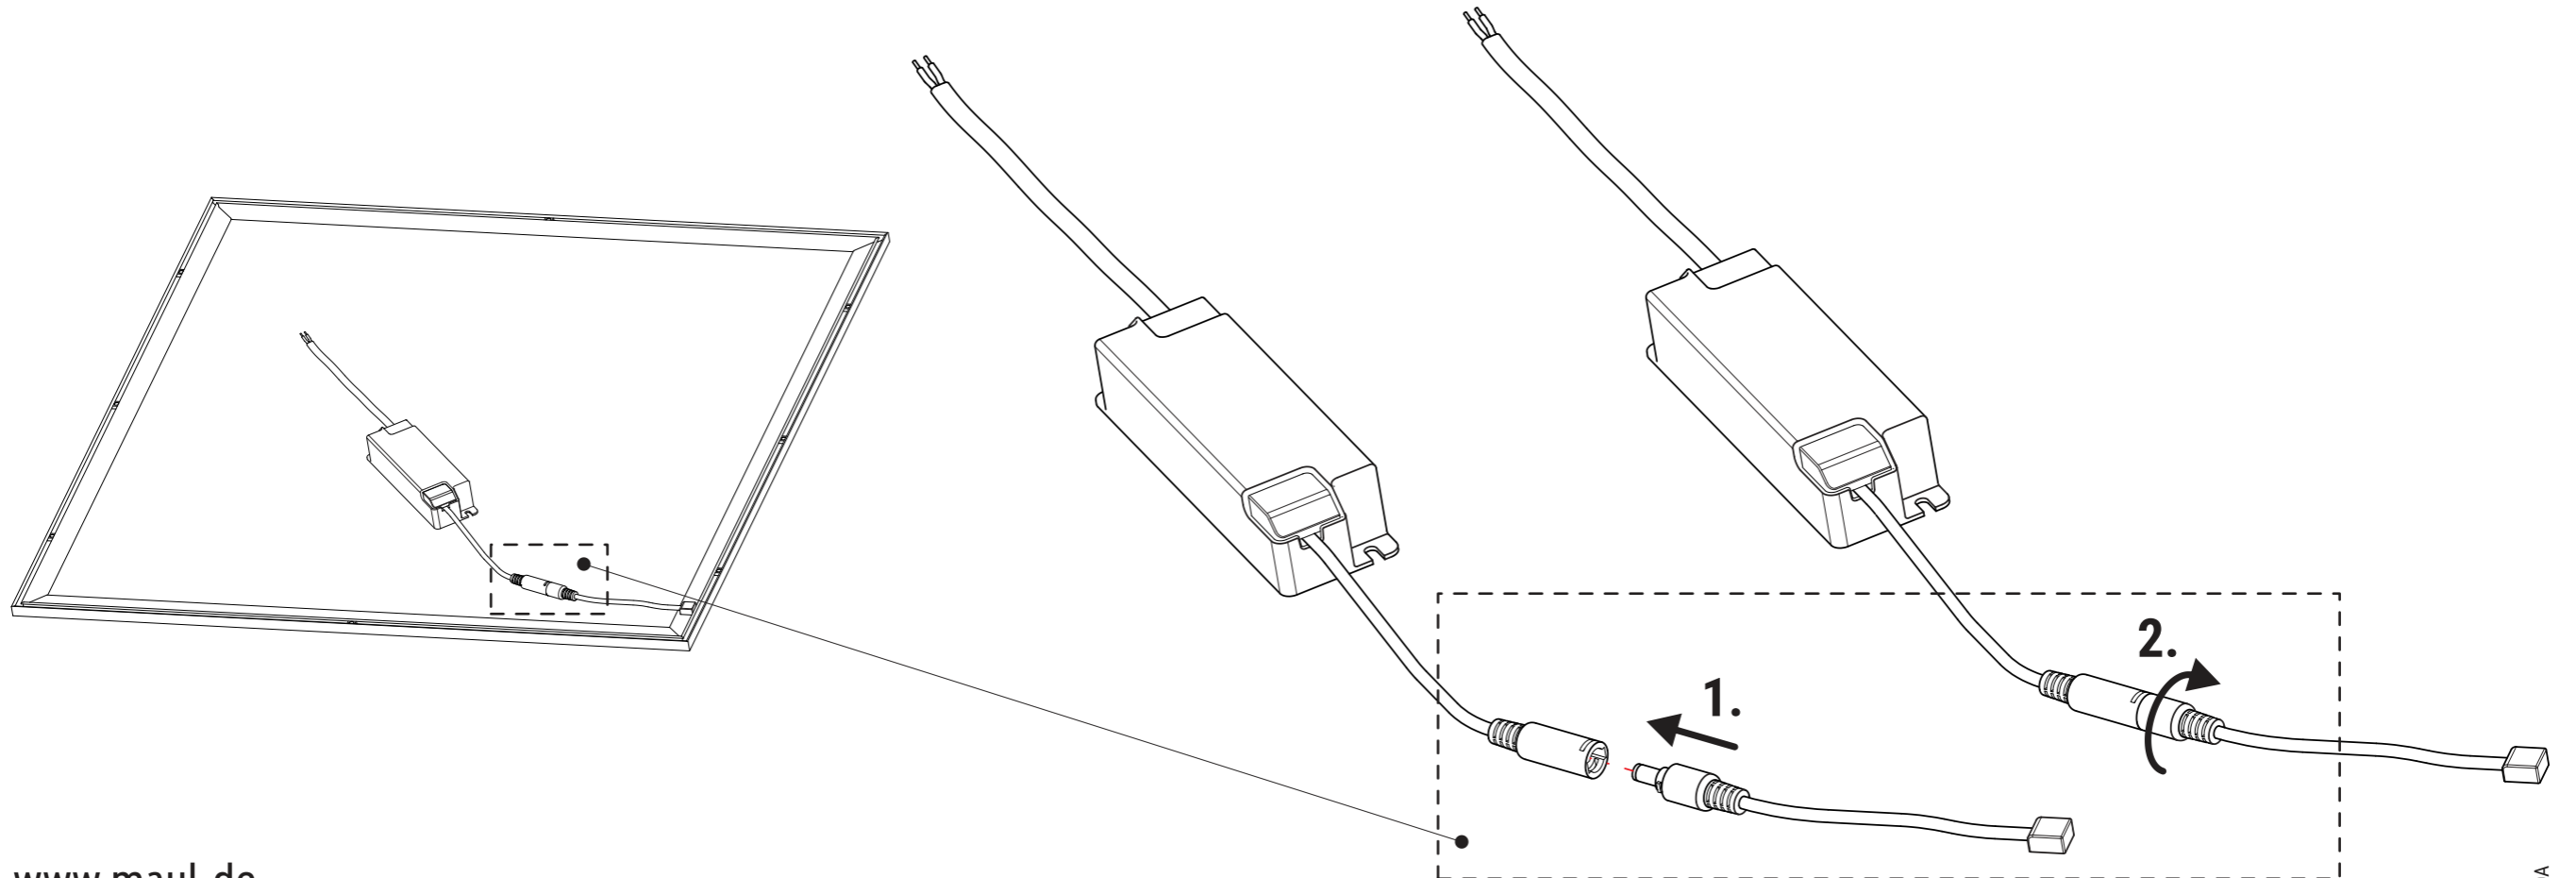

www.maul.de

